





FUJIFILM Business Innovation Corp.

New Times, New Apeos

The new "Apeos" offers advanced features with high security level and easy operability to help business diversify with times. "Apeos" devices are able to connect smoothly with a variety of solutions and services to realise an all new agile remote workstyle of working anytime, anywhere.

FUJIFILM



Uncompromising usability along with compatibility

Quick and simple operability

Streamline operations for remote work style

Towards a sustainable society

Safeguard important



information

Small - Smart - Scalable Solution for your everyday business requirements

Apeos C3060/C2560/C2060

Copy/F	Print	S	ican	Fax ^{*4}	Printing Resolution	Control Panel	
Colour/Mon C3060 30 C2560 29 C2060 20	0 ppm ^{*1} 5 ppm ^{*1}	2 sided Scanning	^{Aonochrome} 80 ppm ^{*2*3} 55 ppm ^{*3}	Super G3 FAX	1200 × 2400 dpi	7 inches	•Wireless LAN Supported •Mobile Supported •Cloud Interactive

*1: A4 LEF. *2: For C3060/C2560 single pass DADF model (2 sided scanning). *3: A4 LEF 200 dpi to Folder. *4: Optional.

Various combinations







- North

Standard Configuration Model-1T

With 1 Tray Module with Cabinet*

With 3 Tray Module*

With Side Tray Supports distribution output for each of copy, print, and fax jobs

Uncompromising usability along with compatibility

Multipurpose device with small footprint and easy setup

- Compact design with width of 590 x depth of 659 mm
- Select a right configuration of 1, 2 or 4 trays as per your growing requirements

Compact design allows you to place it on your desktop



Shared machines for offices.

Increase to maximum paper capacity of 2096 sheets*.

* 80 gsm Paper, Standard + 3 Tray Module (optional).

Quick scanning of high-volume originals^{*1}


- Up to 80 ppm Single Pass Scanning supported^{*2}
- Up to 130 sheets paper capacity
- One pass DADF will not damage the original document
- Instantly scan without manual entry of each original size
- Automatically converts custom size originals to standard size

*1: C3060 / C2560 single pass DADF model.

*2: 1 pass 2 sided scanning. Our Standard Paper (A4 LEF), 200 dpi, to Folder.



Automatically scans small originals as-is to a standard size



Exceptional colour accuracy and print quality

- High-resolution printing of 1200 x 2400 dpi achieved with LED printhead
- Smooth slating line and text reproduction with image enhancement processing
- Digital Correction Technology IReCT*, reduces colour-to-colour misregistration
- * Image Registration Control Technology.



Direct scan to or print from USB* for efficient operations

 You can directly print the documents stored on a USB flash drive or scanned data can be directly stored on a USB flash drive without using a PC

* Optional.



Various finishing options are available according to your needs

Finisher-A2

Finisher-B5 with Booklet Maker Unit



Supports single and double Staple-free Stapling^{*1}



- *1: Staple-free stapling is available with Finisher-B5.
- *2: Optional. *3: Booklet Maker Unit is required. When specifying Saddle Staple or Single Fold with Finisher-B5, paper is not folded but creased.
- *4: 80 gsm paper or less.

Quick and simple operability

Simple layout with easy navigation

Black and gray tone UI gives better contrast for easy recognition.

- Icons are evenly spread for easy recognition
- Consistent operation steps of each function for easy recall
- Home screen personalisation for ease of access to commonly used functions
- Pin regular settings for registering frequent or repeated jobs
- Clear visible light notifications for completed or error jobs
- Subtle sound notification for alert and attention

Smartphone becomes a "portable operation panel"

Seamless connectivity with mobile devices for Copy, Fax, Print, Scan¹ jobs using the Print Utility² application.

- Mobile device can be used as an alternative UI for operations control to minimise common touch points
- Frequent settings can be saved as "Favourites"
- Directly send fax or email with the addresses stored in the smartphone
- Minimise printer touch points for hygiene reasons
- Quickly establish direct Wi-Fi connection by scanning the QR code on the user panel
- Note: Connect to machine via wireless environment or Wi-Fi direct connection.

*1: E-mail, Scan to Folder.

*2: It can be downloaded free of charge from Google $\mathsf{Play}^{\mathsf{m}}$ or App Store.

Flexibility in office layout

Supports wireless LAN environment^{*1}.

- Supports free addressing in the office with Wi-Fi support
- Up to five Wi-Fi Direct multifunction devices can be connected at the
- same time
 Supports direct mobile printing^{*2}
- Print Utility, AirPrint, and Mopria[®] Print Service are supported

*1: Optional.

*2: When connecting to Wi-Fi Direct.

Print out from any multifunction device within the office

With Server-less On-Demand Print*, you have the flexibility to print and collect the print outs from any of the connected multifunction devices.

- Improves productivity by printing from another available multifunction device when the current device is in use
- Up to 100 units can be linked
- Specific job settings can be revised at the device level to save time (1 sided to 2 sided, adding staple, all monochrome)
- * Optional.

Simple device management with Server-less Authentication

Server-less Authentication* enables user information to be synchronised among multifunction devices in the same group and allows administrators to reduce their workloads.

- Simply tap your card to link the user ID with the multifunction device
- The ID information is automatically shared with the other multifunction devices in the same network
- Authentication can be performed with any devices in the office
- * Optional.





Simple scanning to yourself

With ScanAuto, you can easily send scanned data with a touch of a button.

- Automatically adjusts the orientation or 1-sided/2-sided of the original document
- Automatically sets user mail address as the destination by using user authentication function

Multiple destination scanning


Multiple destination scan enables concurrent multi destinations, scan to PC folders, e-mail, and URL.

 Business continuity planning can be established by saving a copy of each scan on PC or Server (URL)

Digitisation of paper documents for effortless document management

With Scan Delivery*, you can automatically process and store scanned images by simply pressing the preset button for each workflow or document type.

- Automate to set file format, file name, OCR*, etc.
- Automatically stores scanned and processed documents in the appropriate destination
- Specify particular words or characters in a document as the folder or file name
- Ø and other frequently mis-recognised characters can be read correctly
 * Optional.
- optionui.




Where QR code or bar code is available on the headsheet or content body of the original document for scanning, Scan Delivery will recognise and process the information accordingly.

Streamline operations for remote work style

Share information anytime, anywhere

With Working Folder* and internet access, documents can be viewed regardless of time and location.

- Can be linked smoothly with multifunction devices, DocuWorks, and mobile devices
- Documents in Working Folder can be printed from the control panel Scanned documents will be assigned a file name and stored in Working Folder. An email notification will be sent to relevant users

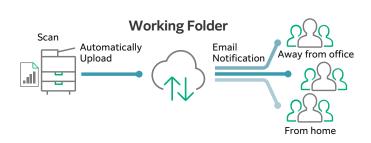

* Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Easy and secure output even when you are working remotely


With Cloud On-Demand Print*, you can register documents from a PC or mobile device to the cloud server and print them from the designated multifunction device.

- Can be operated securely using a User ID and password
- Fear of loss or stolen data is minimised
- No dedicated driver is required
- * Cloud services provided by FUJIFILM Business Innovation. A separate contract is required

Centralised cloud integration

Cloud Service Hub* allows single sign-on to multiple cloud storage services.

- Specific storage location can be assigned for scanned documents directly from the multifunction device
- Searching documents from multiple cloud services is supported
- Full-text search on scanned documents can be performed with OCR



* Cloud services provided by FUJIFILM Business Innovation. A separate contract is required

Towards a sustainable society

FUJIFILM Group strive for developing a sustainable society by means of environment friendly products with less power consumption and CO2 emissions.

Reducing energy consumption

- -Less energy & noise with high resolution printing on LED printhead -Low temperature fusing & high quality print with EA-Eco toner
- -Smart Energy Save distributes power only to the features requested by users
- Smaller carbon footprint
 - -Reduce CO₂ emissions by adoption of environmentally friendly inedible woody biomass plastic for selected parts
 - -Deploy recycling system that collects and recycles used devices and consumables

- Reducing wastage
- -Zero waste & contamination free setup with Staple-free Staple -Reduce unnecessary paper consumption by using functions like paperless fax, multi-up printing, scan workflow and authentication process to restrict wasteful printing



Hospitality (Food and Service) Industry

Hospitals

- Inclusive society -Switch swiftly between multiple languages* on the UI panel for a diverse workforce in your office
- * Japanese, English, Chinese (Simplified/Traditional), Korean, Thai, Vietnamese, and Indonesian.

Safeguard important information

Information is an important asset which should be protected at all cost

Protect from unauthorised user

Multiple options of setting user authorisation allow administrator to select a right combination as per given environment.

- Local Authentication
- Authentication by Remote Server
- IC Card Authentication*
- User-specific feature access
- Private Charge Print
- * Optional.

Additional layer of unwanted access can be created for specific users. (e.g. guests).

- Secondary Ethernet Kit*
- * Optional.

Protects Data

Protects against any malicious intent of hacking, tampering with device / system settings.

- Encryption of stored data
- Uses TPM* 2.0 chip for encryption key management
- Deletes settings and document information all at once
- * Trusted Platform Module

Protects the information by means of strong encryption while transferring it between devices, servers etc.

- Encryption of communication paths by SSL/TLS or IPsec
- Encryption when transferring via SMBv3 and SFTP
- Scan file encryption/signature
- Email encryption and signature by S/MIME
- TLS version limit
- Elliptic curve cryptography
- WPA3

Reliable support system

Easy solutions to resolve problems

From supplies replacement to unexpected device failures, most problems can be resolved without waiting for the service representatives or sales representatives.

1. Resolve problem using the "Help" function on the device

- Self Help information is available on the control panel
- Self Help information can be accessed via the mobile device by scanning the QR code displayed on the control panel

two t

2. "Remote Assistance" with the help of operators

- Connects directly to the Support Centre
- An operator will remotely access the multifunction device to resolve the problem by guiding through the steps on the shared control panel

Protect from unauthorised access

Protects device settings at multiple levels by clearly demarking change restrictions for different target audience - End users, IT administrators and Service Engineers.

- Service representative operation restriction
- Account lock to prevent unauthorised access
- Information for changing the default password
- Warnings displayed when using global IP address

Prevents unauthorised program from installing without notice. Robust IT audits are supported with device data logs for easy tracking.

- Software signature verification
- Remote update restrictions
- IP address filtering
- Tampering detection at startup and automatic restoration when tampering is detected
- Prevention of tampering during operation
- Audit log
- Audit log system transfer

Prevents operation errors

Prevents information leakage due to inadvertent mistakes by administrators and users.

- Scan documents to be delivered to fixed destination
- Re-enter fax recipient
- Annotations
- Hidden text printing*
- Digital code embedding and tracking function*
- * Optional



Keeping a close eye on your multifunction device on a daily basis

Monitoring the multifunction device status to minimise operation down time.

- Check billing meter
- Automatically delivers consumables when cartridges level is low
- Detect machine errors for early invention to rectify the problem Note: You need to apply for using the EP service. (free of charge).

Apeos C3060 / C2560 / C2060 **Functions & Specifications**

Basic Specifications / Copy Function

Item Type		C3060	C2560	C2060
		Desktop / Console		
Memory Capacity Storage Device Capacity*1		4 GB (Max: 4 GB)		
Storage Device Capacity*1 Colour Capability				
Scan Resolut		Full colour 600 x 600 dpi		
Printing Res	Slution	1200 x 2400 dpi	- / Custom Comisso	1 *2
Warm-up Tii	me*2	When enabled: 28 temperature)		degrees Celsius room degrees Celsius room
Recovery Tir (Recovery Ti Sleep Mode)	me from	14 seconds or less	12 seconds or less	12 seconds or less
Original Size		(23 degrees Celsius room temperature) Maximum of A3, 11 x 17", 297 x 432 mm for both Sheet and Book		
	Max	A3, 11 x 17"		
D C:	Min		x 148 mm), when us	ing Bypass Trav]
Paper Size	Image loss width	A5 [Postcard (100 x 148 mm), when using Bypass Tray] Lead edge 4.0 mm, Trail edge 2.0 mm, Right/Left edge 2.0 mm		
Paper	Paper Tray	60 to 256 gsm		
Weight ^{*4}	Bypass Tray	60 to 216 gsm		
First Copy	4.9 sec. 5.9 sec. B/W (A4 LEF / (A4 LEF / Monochrome pric Monochrome		rome priority mode)	
Output Time	Colour	6.7 sec. (A4 LEF / Colour priority mode)	8.1 sec. (A4 LEF / Colour p	riority mode)
	A4 LEF / JIS B5 LEF	B/W: 30 ppm, Colour: 30 ppm	B/W: 25 ppm, Colour: 25 ppm	B/W: 20 ppm, Colour: 20 ppm
Continuous	A4	B/W: 23 ppm, Colour: 23 ppm	B/W: 19 ppm, Colour: 19 ppm	B/W: 16 ppm, Colour: 16 ppm
Copy Speed ^{*5}	JIS B5	B/W: 17 ppm, Colour: 17 ppm	B/W: 14 ppm, Colour: 14 ppm	B/W: 11 ppm, Colour: 11 ppm
	JIS B4	B/W: 20 ppm, Colour: 20 ppm	B/W: 16 ppm, Colour: 16 ppm	B/W: 13 ppm, Colour: 13 ppm
	A3	B/W: 17 ppm, Colour: 17 ppm	B/W: 14 ppm, Colour: 14 ppm	B/W: 11 ppm, Colour: 11 ppm
	Standard			
Paper Tray	Optional	500 sheets x 1-tray + Bypass Tray 96 sheets 1 Tray Module with Cabinet: 500 sheets x 1-tray		
Capacity*6	Max	3 Tray Module: 500		.1
	Max		lard + 3 Tray Module	
Output Tray	Capacity*7	(A4 LEF)	sneets (A4 LEF), Lov	wer Center: 250 sheet
Power Suppl	y		0 %, 8 A, 50/60 Hz	common
Maximum Po	ower	1.76 kW (AC220 V Sleep Mode: 0.4 W	+/- 10 %), 1.92 kW (AC230 V +/- 10 %)	(AC240 V +/- 10 %)
Consumptio		Ready Mode: 83 W W 590 x D 659 x H	(AC230 V +/- 10 %	<u>)</u>
Dimensions	Model-CPS (C2060)	W 590 x D 659 x H with Cabinet is insta	1122 mm (when op alled.)	tional 1 Tray Module tional 3 Tray Module i
Dimensions	Model-CPS-B (C2560 and C3060)	with Cabinet is insta	1118 mm (when op alled.)	tional 1 Tray Module tional 3 Tray Module i
14/ 1 1:40	Model-CPS (C2060)	68 kg 91 kg (when option 94 kg (when option	al 1 Tray Module wit al 3 Tray Module is i	th Cabinet is installed. nstalled.)
Weight*8	Model-CPS-B (C2560 and C3060)	93 kg (when option	al 1 Tray Module is i al 1 Tray Module wit al 3 Tray Module is i	th Cabinet is installed.

*1: The Storage Device Capacity is not totally available for customers.
*2: It may change depending on usage conditions.
*3: Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed.
*4: It is recommended to use our recommended paper. Correct print output may not be possible in the setting of th

*4: It is recommended to use our recommended paper. Correct print depending on the requirement.
*5: The speed may be reduced due to the image quality adjustment.
*6: 80 gsm paper.
*7: 70 gsm paper.
*8: Excluding Toner Cartridge.

Print Function

ltem		Description
Туре		Built-in type
Continuous Print Speed*1		Same as the Basic Specifications / Copy Function
Printing Resolution	Standard	[PCL Driver] Standard: 1200 x 2400 dpi, High Quality: 1200 x 2400 dpi, High Resolution* ² : 1200 x 1200 dpi
	Optional	[Adobe [®] PostScript [®] 3 [™] Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1200 x 2400 dpi, High Resolution*2: 1200 x 1200 dpi
Page	Standard	PCL5 / PCL6
Description Language	Optional	Adobe® PostScript® 3™
Supported Operating System ^{*3}	Standard	[PCL Driver] Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) [Mac OS X Driver] macOS 11 / 10.15 / 10.14 / 10.13
	Optional	[Adobe® PostScript® 3™ Driver] Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) macOS 11 / 10.15 / 10.14 / 10.13
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0
interiace	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)
*1: The speed	d may be reduc	ed due to the image quality adjustment. The printing speed may be

 *1: The speed may be reduced due to the image quality adjustment. The printing spireduced depending on the document.
 *2: High Resolution mode is recommended for printing fine lines or cadastral maps.
 *3: Please refer to our official website for the latest supported OS. age qı ty ng sp

Scan Function

Item		Description	
Туре		Colour Scanner	
Scan Resolution		600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi	
Scan Speed		Same as the Scan Speed for the Duplex Automatic Document Feeder	
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T	
intenace	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)	

Fax Function (Optional)

Item	Description	
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm)	
Recording Paper Size	Max: A3, 11 x 17"; Min: A5	
Transmission Time	2 seconds and more but fewer than 3 seconds ^{*1}	
Transmission Mode	ITU-T G3	
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports ^{*2} (G3-3 ports)	

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.
 *2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

Item		C2060	
Original Size /		Max: A3, 11 x 17"; Min: A5 ^{*1}	
Paper Weight		38 to 128 gsm (In Duplex: 50 to 128 gsm)	
Capacity*2		110 sheets	
Scan	Copy (A4 LEF, Simplex)	B/W: 20 ppm, Colour: 20 ppm	
Speed*3	Scan	B/W: 55 ppm, Colour: 55 ppm [Standard Document (A4 LEF), 200 dpi, to Folder]	
Note: Installed for Model-CPS as standard. *1: The minimum custom size is 125 x 85 mm.			

*1: The minimum custom *2: 70 gsm paper. *3: The scanning speed varies depending on the documents.

Duplex Automatic Document Feeder [1 pass, 2 sided scanning]

Duplex Automatic Document recuer [1 pass, 2 sided scanning]				
Item		C3060	C2560	
Original Size / Paper Weight		Max: A3, 11 x 17"; Min: A6 ^{*1} 38 to 128 gsm (In Duplex: 50 to 128 gsm) ^{*2}		
Capacity*3		130 sheets		
Scan	Copy (A4 LEF, Simplex)	B/W: 30 ppm, Colour: 30 ppm	B/W: 25 ppm, Colour: 25 ppm	
Speed*4	Scan	B/W: 55 ppm, Colour: 55 ppm (1 pass, 2 sided scanning: B/W 80 ppm, Colour 80 ppm) [Standard Document (A4 LEF), 200 dpi, to Folder]		
Note: Installed for Model-CPS-B as standard.				

*1: The minimum custom size is 49 x 85 mm.
*2: Custom sizes from 49 x 85 mm to 55 x 91 mm are available from 38 to 209 gsm.
*3: 70 gsm paper.
*4: The scanning speed varies depending on the documents.

Notes

- J) if the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall "the company" be liable for any damages whatsoever arising from loss of data.
 Punctional spare parts will be available for at least 7 years after the product is no longer manufactured.

Side Trav

Item	Description
Paper Capacity*	100 sheets
Dimensions	W 347 x D 419 x H 201 mm
*: 70 gsm paper.	

Finisher-A2 (Optional)

Item Description Sort (Offset available) / Stack (Offset available) Max: A3, 11 x 17"; Min: Postcard (100 x 148 mm) Туре Paper Size 60 to 256 gsm Paper Weight [Without Stapling] A4: 500 sheets; JIS B4: 250 sheets; A3 or larger: 200 sheets; Mixed Size Stacking⁵²: 250 sheets [With Stapling] 30 sets Paper Capacity*1 Capacity A4: 50 sheets (90 gsm or less), JIS B4 or larger: 30 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17"; Min: JIS B5 LEF Paper Weight 60 to 256 gsm Position Single stapling, Dual stapling Staple Dimensions*3 / Weight W 658 x D 461 x H 238 mm, 11 kg

*1: 70 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets. *3: Width 478 mm when the paper support is stored.

Finisher-B5 (Optional)

ltem		Finisher-B5			
Туре		Sort (Offset available*1*2) / Stack (Offset available*1*2)			
Paper Size*3		Max: A3, 11 x 17"; Min: A5			
Paper Weigh	nt	60 to 256 gsm			
Paper Capacity*4		[Without Stapling] A4: 2000 sheets, JIS B4 or larger: 1000 sheets, Mixed Size Stacking ¹⁵ : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets ⁶ , JIS B4 or larger: 75 sets or 750 sheets [With Booklet Finishing ¹⁷] 50 sets or 600 sheets [With Fold ¹⁷] 500 sheets			
	Capacity	50 sheets (90 gsm or less)	Staple: 50 sheets (90 gsm or less) Staple-free Staple* ^{8*9} : 10 sheets (80 gsm or less)		
Ctanla	Paper Size*10	Max: A3, 11 x 17"; Min: A	45 LEF		
Staple	Paper Weight	60 to 256 gsm	Staple: 60 to 256 gsm, Staple-free Staple ^{**9} : 60 to 105 gsm		
	Position	Single stapling, Dual stapling			
	Number of Holes	s 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)			
Punch*11	Paper Size*12	Max:A3, 11×17"; Min: A5 LEF			
	Paper Weight 60 to 220 gsm				
B 11 1	Capacity Saddle Staple: 15 sheets; Single Fold: 5 sheets				
Booklet	Paper Size				
Finishing*7	Paper Weight	Saddle Staple: 60 to 80 gsm ^{*13} , Single Fold: 60 to 105 gsm			
Dimensions*14		W 607 x D 653 x H 1041 mm With Booklet Maker Unit: W 607 x D 673 x H 1079 mm			
Weight		26 kg, Punch Kit: + 2 kg, Booklet Maker Unit: + 10	29 kg, Punch Kit: + 2 kg, kg Booklet Maker Unit: + 10 kg		

Note: Finisher-B5 is available only when optional 1 Tray Module with Cabinet or 3 Tray Module is attached to Main Unit

Note: Both stapled stapling and staple-free stapling are available with Finisher-B5. *1 : The offset feature is set to disabled by factory default. The setting can be changed as necessary. *2 : Outputs less than 210 mm width are delivered without offset stacking. *3 : Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.

: 70 gsm paper.

- '4 : /U gsm paper.'
 '5 : When larger size sheets are stacked on top of smaller size sheets.
 '5 : When larger size sheets with dual stapling.
 '7 : The Booklet Finishing function requires the optional Booklet Maker Unit for Finisher-B. Make a crease allows you to fold easily. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray. the output tray. : Staple-free stapling is available with Finisher-B5.
- *9 : Staple-free stapling does not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned
- over. *10: Available staple positions vary depending on the paper size. *11: The Punch function requires the optional 2/4 Hole Punch Kit for Finisher-B or US 2/3 Hole Punch Kit for Finisher-B. *12: Available number of punch holes varies depending on the paper size. *13: Covers can be up to 220 gsm (Extra Heavyweight). *14: Inner connector within the body is excluded.

Others

Local Authentication

Data Encryption

Remote Authentication
 Azure AD linked authentication (optional)

IC Card Log In (optional)
 Serverless Authentication (optional)

Message screen from an administrator

Secondary Ethernet (optional)
Wi-Fi Support (optional)

Data Overwrite (optional)

Image Log (optional)

Job History Export

Note: More options may need to be added depending on the model

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

personal use, family use or other similar uses within a limited circle. Trademarks - FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. Apeos, DocuWorks, Working Folder, Cloud Service Hub, Cloud On-Demand Print are registered trademarks or trademarks of traUIFILM Business Innovation Corp. Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. Apple, Max, macOS, OS X and AirPrint are trademarks of Apple Inc. registered in the US, and other countries. Mopria, the Mopria Logo, and the Mopria Alliance word mark and logo are registered and other countries. All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or the structure.

The information is as of January, 2022. PIC-0186 AU (2201)

The available model varies depending on the country/region. Please ask the sales representatives for details. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Enhanced basic functions

Сору

- Output Color
- Paper Supply
- Reduce/Enlarge
- Slight Reduction • Auto 2 Sided Output
- Pages per Side (2 Pages / 4 Pages / 8 Pages)
- Copy Output (uncollated/collated)
 Single Color / Dual Color Copy
- Copy (ID Card)
 Mixed Size Originals

- Original Size
 Image Enhancement
- Book Copying / 2 Sided Book Copying Edge Erase
- Image Shift
 Mirror Image / Negative Image
- Image Rotation
 Booklet Creation
- Multiple-Up x Booklet Creation
 Book Copying
- Covers
- Poster
- Repeat Image
- Preset Repeat Image

fxillawarra.com.au

BUSINESS SOLUTIONS

ILLAWARRA

P: 02 4220 5000

FUJIFILM

FUJIFILM Business Innovation Australia Pty Ltd

87 Auburn Street, Wollongong NSW 2500

B \$

Annotations

Watermark(optional) Delete Outside / Delete Inside

- Joint Job
- Sample Job
- Staple / Hole Punch / Crease (optional)

Print

- PCL PostScript (optional)
 Multi-Model Print Driver 2
- Microsoft Universal Print
 Secure Print
- Sample Set
 Delayed Print
- Print from Folder
 Form Registration
 Multiple-Up
 Booklet Creation
- Multiple-Up x Booklet Creation Poster
- Covers / Separators

FUJ¦FILM

BUSINESS INNOVATION

- Envelope printing
 Private Charge Print
 Charge Print
 Print from USB (optional)
 Staple / Punch / Crease (optional)
- Server-less On-Demand Print (optional)

Fax (Optional)

- G3 × maximum 3 ports (optional)
- Internet Fax
- SIP Fax (optional)
 Send Direct Fax
 Address Book (maximum 5000 entries)
- Broadcast Transmission / Group Transmission
 Redial / Resend Unsent Documents
- Rotate 90 Degrees
- Preview 2 Sided Scanning
- Resolution
- Lighten / Darken
 Original Type
- Mixed Size Originals
 Transmission Header
- Priority Send / Delay Start
 Cover Page
- Remote Folder
 Transmission Report
- Activity Report
 Re-enter Recipient
- Prevents Unsolicited Faxes
 Prohibit Direct Fax
- Simple Image Log Support

Scan

- Scan to Folder (TWAIN driver/Web browser) Transfer via SMB/FTP/SFTP
- Email
- Scan (URL)
- Scan to USB (optional)
 Simultaneous transmission such as Email / Transfer via SMB, etc.
- ScanAuto
- Preview
 Color Scanning
- 2 Sided Scanning
 Mixed Size Originals
 File Format: TIFF / JPEG / PDF*1 / XDW(DocuWorks)^{*2}

Single File for Each Page
Searchable Text (optional)

High Compression (High Speed) (optional)

Job Flow Sheets
Scan Delivery (optional)
*1: High Compression / Specific Color / Searchable Text / Security / Signature / Optimise For Quick Web View

*2: Searchable Text / Security / Signature

For Your Safety

short circuit.